

**MODEL NUMBER**

TVH-E40GNPM


**PRODUCT LINE**

Switchbox TVF, TVH, and TVL

**SPECIFICATIONS**

Enclosure	316 Stainless Steel base and lid
Bus/Sensor	(4) p+f model NJ2-V3-N
Area Classification	Intrinsically safe
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) 1/2" NPT
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

**WIRING DIAGRAM**

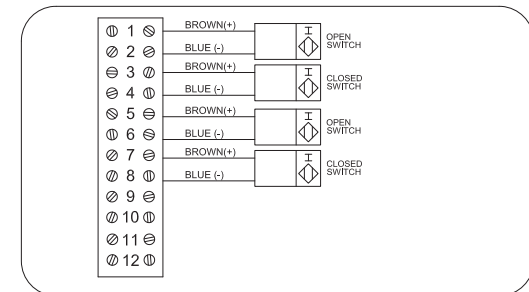


**NAMEPLATE**



CI I Div 1, Grps A-D; CI II Div 1, Grps E-G  
 Type 4X; T4 -50°C ≤ Ta ≤ 60°C; IP66/68  
 Ex ia IIC T4 Gb; -60°C ≤ Ta ≤ 56°C  
 Ex Ib IIIc T75°C Db; -50°C ≤ Ta ≤ 56°C  
 Sira I3ATEX2364X IECEx SIR 13.0146X  
 Install per Control Drawing ES-03042-1  
 Model #:

UL  
 SAFETY FILE # 44  
 E125326  
 USA  
 Telemetering Equipment for Hazardous Locations  
**WARNING:** Substitution of components may impair intrinsic safety. Enclosure contains aluminum - avoid ignition hazards due to impact or friction. Potential electrostatic charging hazard. Clean only with damp cloth.  
**AVERTISSEMENT:** La substitution de composants peut compromettre la sécurité intrinsèque. Boîtier contient de l'aluminium - éviter inflammation due à des risques d'impact ou de friction. Danger potentiel de charge électrostatique. Nettoyer avec un chiffon humide.

TopWorx  
 3300 Fern Valley Road  
 Louisville, KY 40213 USA  
 www.topworx.com  
 Serial #:



Current as of June 26, 2019 – Subject to change without notice.

**TOPWORX**  
 3300 Fern Valley Road  
 Louisville, KY 40213

(502)969-8000 PH  
 (502)969-5911 FAX  
 www.topworx.com